


# XCT/NCT to E-Z-GO-DCS


## FOR SHUNT (SEPERATELY EXCITED) WOUND MOTORS

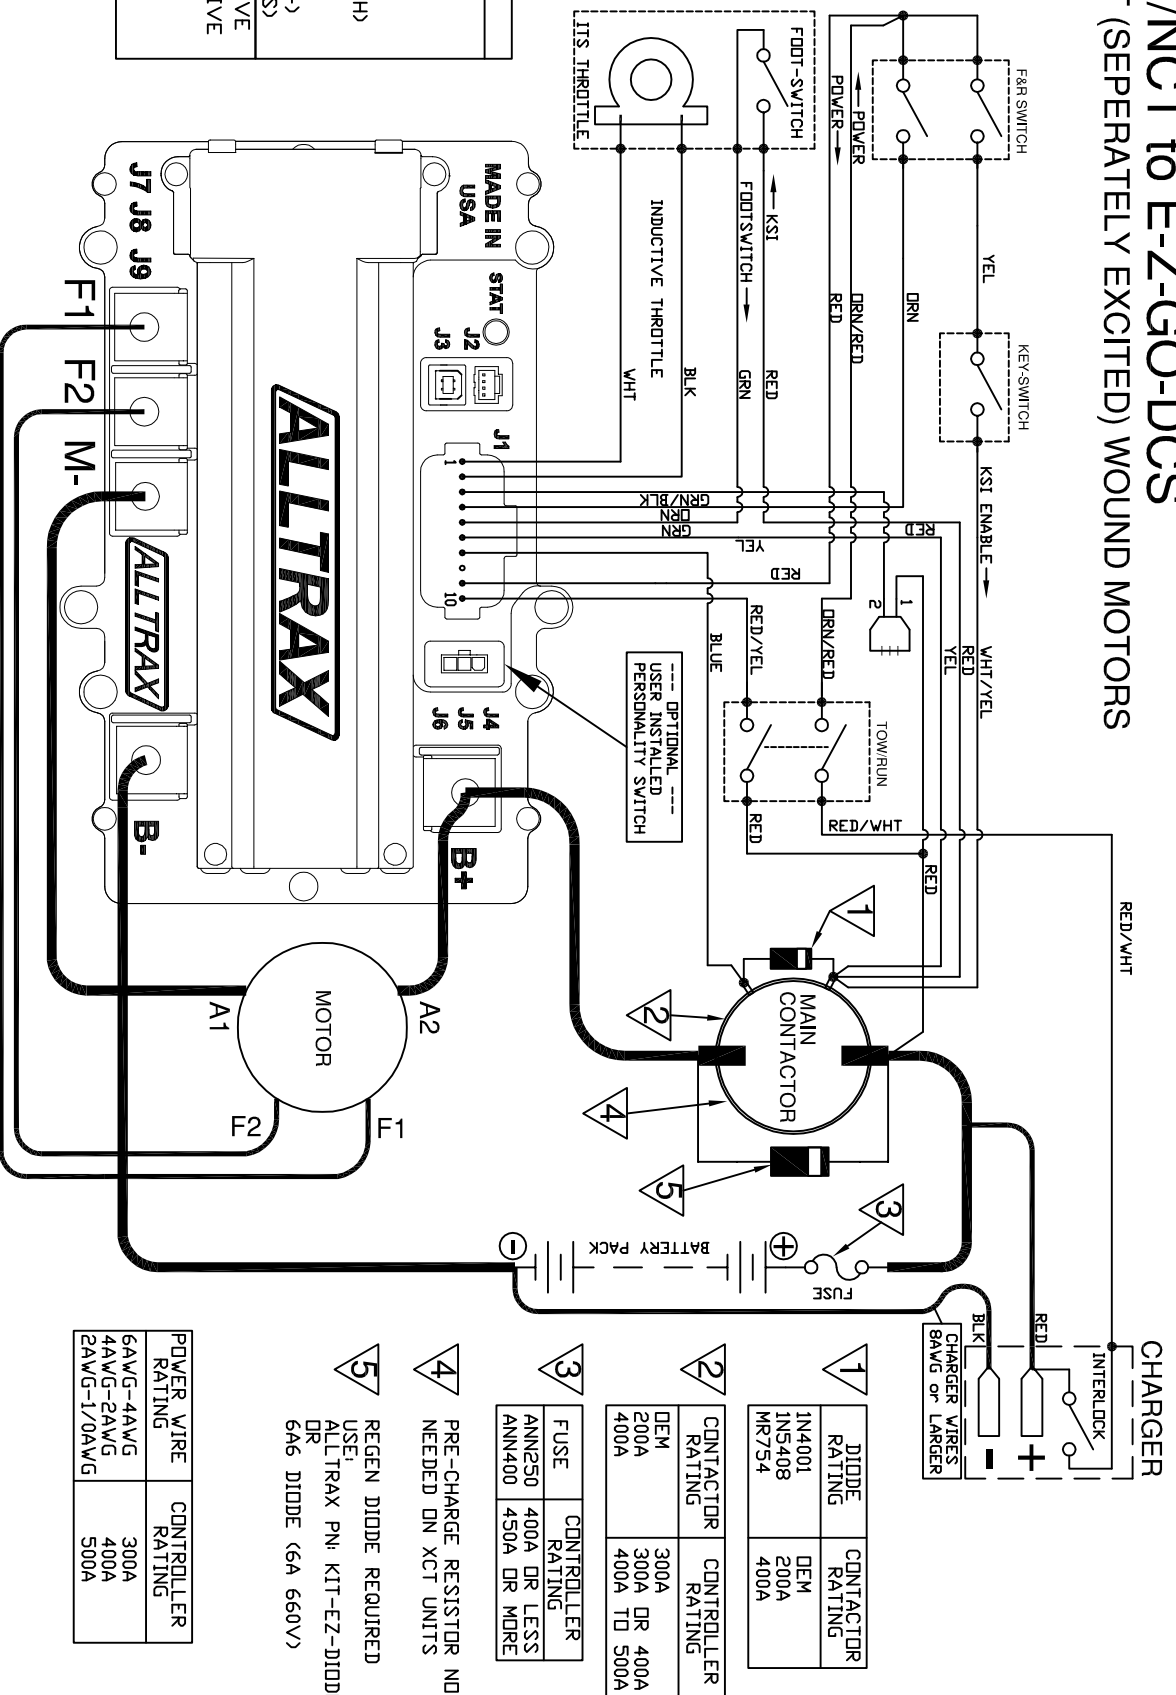

J1	FUNCTION
1	THROTTLE
2	THROTTLE
3	HORN
4	REVERSE
5	FOOT SWITCH
6	KSI (KEY SWITCH)
7	SOLENOID COIL
8	NOT-USED
9	LOGIC POWER (+)
10	B+ POWER (CAPS)
B+	BATTERY POSITIVE
B-	BATTERY NEGATIVE
J9	MOTOR MINUS
J8	MOTOR FIELD
J7	MOTOR FIELD

### NOTES:

- \* FUSES REQUIRED FOR ALL INSTALLATIONS
- \* DIODE REQUIRED ACROSS COILS / RELAYS
- \* TOW/RUN SWITCH PREVENTS REGEN WHILE TOWING
- > ASSUMES FOOTSWITCH IS OPEN WHEN THROTTLE OFF
- > ALLTRAX RESERVES THE RIGHT TO CHANGE DOCUMENTATION WITHOUT NOTICE
- > ALLTRAX MAKES NO WARRANTY AS TO THE ACCURACY, SUFFICIENCY, OR SUITABILITY OF ANY TECHNICAL OR OTHER INFORMATION PROVIDED
- > SEE OPERATORS MANUAL FOR MORE INFORMATION

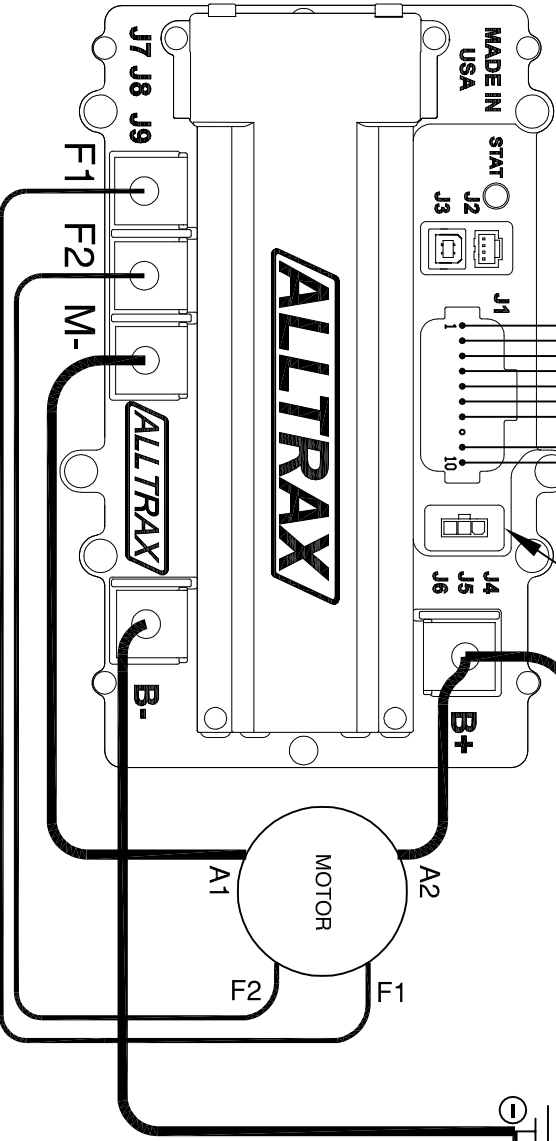

REVISIONS				DWG SCALE: NTS		TITLE		
REV.	ECO.	DATE	APVD	DRAWN	R CSUK	111114	XCT to E-Z-GO DCS	
E	092816	092816	RC	ENGR	D CROCKETT	120206	Writing Diagram	
<p>PROPRIETARY</p> <p>THIS TECHNICAL DATA IS PROPRIETARY AND SHALL NOT BE REPRODUCED, RELEASED, OR DISCLOSED IN WHOLE OR IN PART WITHOUT THE PERMISSION OF ALLTRAX INC.</p>								
FILE:	_DWG-XCT-EZGO-DCS-wire-dia.dwg						SHEET	1 of 1

DO NOT SCALE DRAWING

11111 Cheney Creek Rd.  
Gresham, OR 97030  
PHONE: (503) 476-3565